
CERAMIC CORNER RADIUS END MILLS

ULTRA HIGH PRODUCTIVITY FOR NICKEL BASED HEAT
RESISTANT ALLOYS



CERAMIC CORNER RADIUS END MILLS

FEATURES


• Optimized helix angle reduces cutting forces and to prevents pull-out during milling

• Seamless grinding technology gives higher chipping resistance even during extreme roughing applications



• 4-flute type for pocketing and slotting
6-flute type for face machining and profiling

• Optimum ceramic grade for HRSA applications

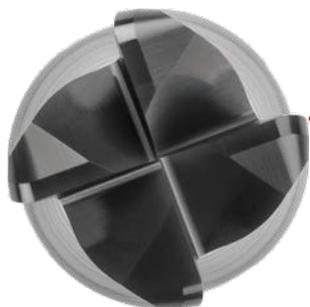


• Strong, negative flute and special rake edge withstands high temperatures and loads

CERAMIC CORNER RADIUS END MILLS

FROM DIFFICULT-TO-CUT TO EASY-TO-CUT!


GENERATION OF CUTTING HEAT

FEATURE OF Ni BASED HEAT-RESISTANT ALLOY

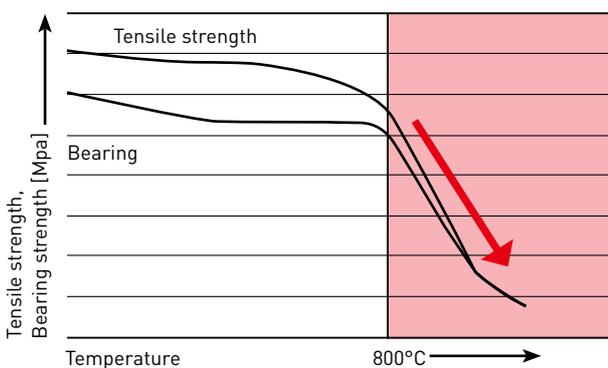

Ni based difficult-to-cut heat resistant alloys such as Inconel 718 soften at temperatures exceeding 800°C. At these temperatures, difficult-to-cut materials become easier to machine because their bearing and tensile strengths are lowered. Ceramic end mills can work effectively at these high temperatures and self generate the heat required to soften the material to be machined by using ultra-high feeds and speeds.

HIGH TEMPERATURE HARDNESS OF CEMENTED CARBIDE AND CERAMIC

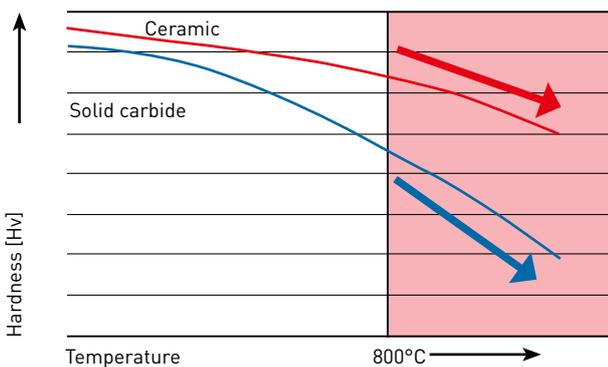

Cemented carbide end mills are significantly reduced in strength when exceeding 800°C. However, the strength of ceramic end mills is not affected and therefore can be used at the high speeds and depths of cut required to generate sufficient heat to enable effective machining.

CE4SRB / CE6SRB

CORNER RADIUS END MILL, SHORT CUT LENGTH, 4-6 FLUTE

S Ni





DC<12
0.02
- 0.02



DC=6	DC=8.10	DC=12
- 0.008	- 0.009	- 0.011
- 0.028	- 0.029	- 0.031



DCON=6	DCON=8.10	DCON=12
0	0	0
- 0.008	- 0.009	- 0.011

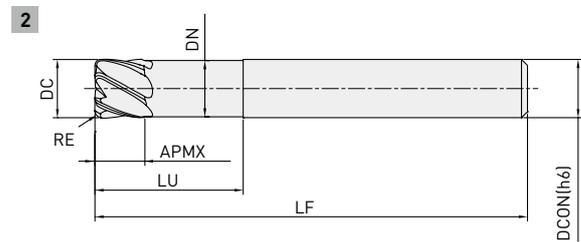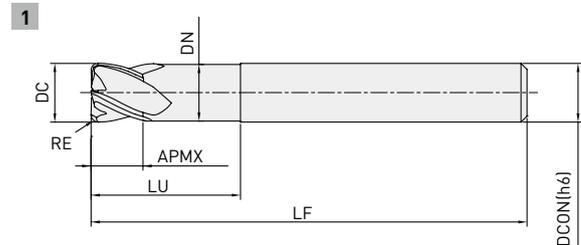

- Ceramic corner radius end mill with high heat resistance.
- Capable of softening Ni based alloys by generating heat during machining.

Order number	Stock	DC	RE	APMX	LF	DCON	DN	LU	ZEFP	Type
CE4SRBD0600R050	●	6	0.5	4.5	50	6	5.85	12	4	1
CCE4SRBD0800R100	●	8	1.0	6.0	60	8	7.85	16	4	1
CE4SRBCE4SRBD1000R100	●	10	1.0	7.5	65	10	9.70	20	4	1
CE4SRBCE4SRBD1200R150	●	12	1.5	9.0	70	12	11.70	24	4	1
CE6SRBD0600R050	●	6	0.5	4.5	50	6	5.85	12	6	2
CE6SRBCE6SRBD0800R100	●	8	1.0	6.0	60	8	7.85	16	6	2
CE6SRBCE6SRBD1000R100	●	10	1.0	7.5	65	10	9.70	20	6	2
CE6SRBCE6SRBD1200R150	●	12	1.5	9.0	70	12	11.70	24	6	2

1. Never use ceramic end mills to cut titanium alloys. Doing so will cause a risk of ignition and can be extremely dangerous.




CE4SRB / CE6SRB

RECOMMENDED CUTTING CONDITIONS

CE4SRB


SIDE MILLING

Material	DC	Vc	fz	ap	ae
S Nickel-based heat resistant super alloy (Inconel etc.)	6	≥350	≤0.06	≤4.5	≤1.2
	8	≥350	≤0.06	≤6.0	≤1.6
	10	≥350	≤0.06	≤7.5	≤2.0
	12	≥350	≤0.06	≤9.0	≤2.4



SLOTTING

Material	DC	Vc	fz	ap
S Nickel-based heat resistant super alloy (Inconel etc.)	6	≥350	≤0.03	≤1.0
	8	≥350	≤0.03	≤1.5
	10	≥350	≤0.03	≤2.0
	12	≥350	≤0.03	≤2.5




1. Do not use on titanium alloys.
2. The outermost layer of the material may be affected by heat. Ensure a minimum of 0.3 mm final machining allowance remains.
3. The recommended ramping angle is 1.5°C. When conducting ramping it is recommended to reduce the feed rate by 50 % from the cutting conditions shown.
4. Gradually increase the width of cut (ae) starting from 0.05D.

CE6SRB

SIDE MILLING

Material	DC	Vc	fz	ap	ae
S Nickel-based heat resistant super alloy (Inconel etc.)	6	≥350	≤0.06	≤4.5	≤1.2
	8	≥350	≤0.06	≤6.0	≤1.6
	10	≥350	≤0.06	≤7.5	≤2.0
	12	≥350	≤0.06	≤9.0	≤2.4




1. Do not use on titanium alloys.
2. The outermost layer of the material may be affected by heat. Ensure a minimum of 0.3 mm final machining allowance remains.
3. The recommended ramping angle is 1.5°C. When conducting ramping it is recommended to reduce the feed rate by 50 % from the cutting conditions shown.
4. Gradually increase the width of cut (ae) starting from 0.05D.

CERAMIC CORNER RADIUS END MILLS


CUTTING PERFORMANCE

TOOL LIFE COMPARISON - INCONEL®718 (HRC 45)

Tool	CE6SRBD1000R100
Depth of cut (mm)	ae = 1.0 ap = 7.0
Overhang (mm)	20
n (min ⁻¹)	19.098
f (mm/min)	6.875
Cutting mode	Down cut
Ceramic	Dry (No air blow)



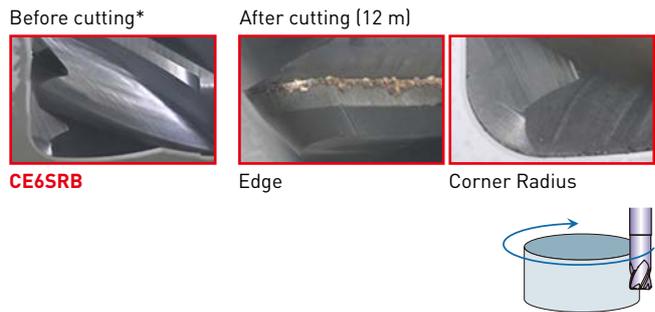


Tool	VF6MHVRBD1000R100
Depth of cut (mm)	ae = 1.0 ap = 7.0
Overhang (mm)	20
n (min ⁻¹)	1.910
f (mm/min)	688
Cutting mode	Down cut
Solid Carbide	Wet cutting

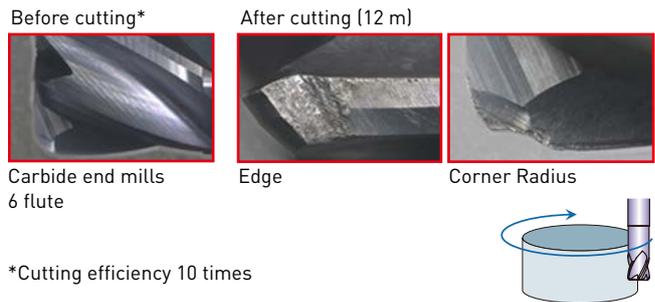

TOOL LIFE COMPARISON-INCONEL®718 (HRC 45)

Tool	Ø12 x R 1.5
Depth of cut (mm)	ae = 2.4 ap = 9.0
n (min ⁻¹)	8.568 (700 m/min)
f (mm/min)	6.684 (0.06 mm/tooth)
Overhang (mm)	24
Cutting mode	Dry (No air blow)

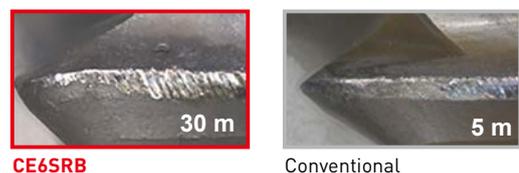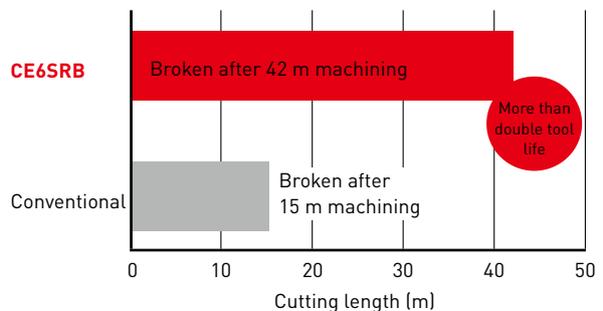

CERAMIC CORNER RADIUS END MILLS

PRECAUTION

CUTTING CONDITIONS

Requires high cutting speeds (from 350 m/min into 1000 m/min)
High speed cutting is required to generate the heat needed to soften materials without causing abrasion or other damage.

Recommendation for air blow

Do not use coolant, it can cause thermal cracking.
Air blow is not used for the purpose of cooling and should not be directed at the tool. It should be only used for chip evacuation.




Example of thermal cracking

APPLICATIONS

Recommendations for continuous cutting


Continuous cutting is highly recommended.
Damage or chipping can occur during interrupted cutting.

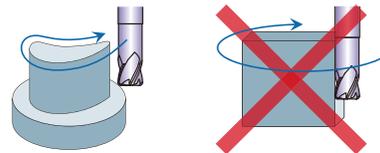


Continuous cutting

Interrupted machining

Using maximum width and depth of cut from the start of machining may cause damage.
Increase the width of cut (ae) gradually to maintain tool life.

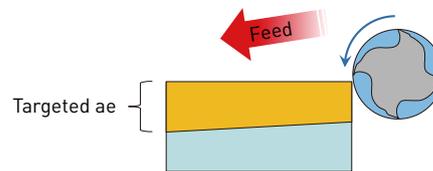

Down cut/climb milling is highly recommended.
Up cutting can be unstable.

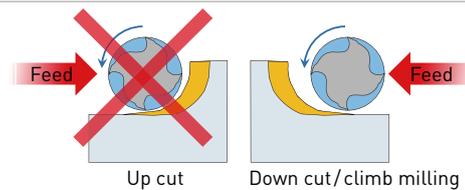


Up cut

Down cut/climb milling


RECOMMENDATIONS

Tool holder recommendation

First recommendation for tool holding is a hydraulic chuck, second recommendation is a precision milling chuck. Collet chucks are not suitable.

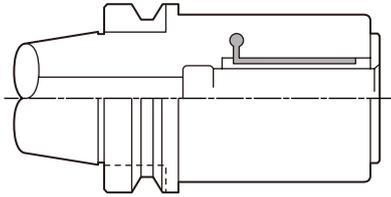

Hydraulic chuck

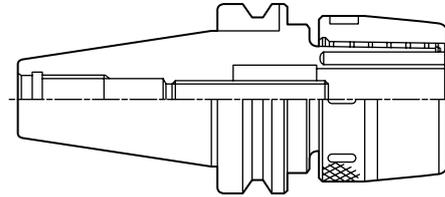

Precision milling chuck


Do not remove any built up edge manually after machining as this may cause chipping. The built up edge will be removed by the heat generated during the next cutting cycle.

Final machining allowance


Leave a minimum of 0.3 mm finishing allowance. Machining with ceramic end mills at high temperatures can affect the outermost layer of the machined material, therefore a final machining allowance must remain.

Do not use open type machines

The chips generated during machining are extremely hot. Ensure the inside of the machine is free from any combustible materials.

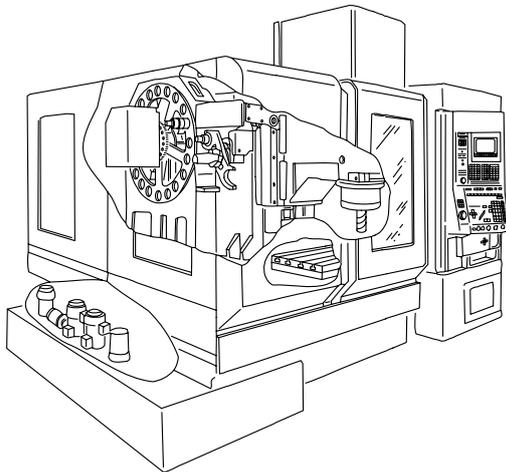

Covered machining centre

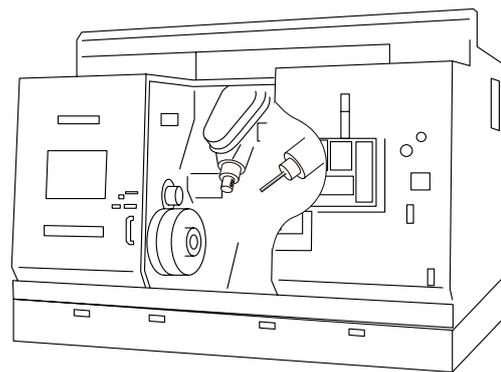

Covered turn mill type machine

GERMANY

MMC HARTMETALL GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

U.K.

MMC HARDMETAL U.K. LTD.
Mitsubishi House . Galena Close . Tamworth . Staffs. B77 4AS
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros/Valencia
Phone +34 96 1441711 . Fax +34 96 1443786
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MMC HARTMETALL GMBH ALMANYA - İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı /İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mitsubishicarbide.com | www.mmc-hardmetal.com

DISTRIBUTED BY:

□

□

┌

└

B228E



Published: 2015.07